

QINGDAO YILU INTELLIGENT EQUIPMENT CO., LTD



YILU LIFT

Whatsapp / Wechat: +86-13889928667

Tel: +86-0532-86971060

Email: sales@yilulift.com

Web: www.yilulift.com

Add: No. 7 Jiaxin Road, Jimo District,
Qingdao, China

YILU LIFT

YILU SUCCESS MACHINERY SUCCESS



LIFTING EQUIPMENTS MANUFACTURER

QINGDAO YILU INTELLIGENT EQUIPMENT CO., LTD

ABOUT



US



Qingdao YILU Intelligent Equipment Co., Ltd is a leading factory located in Qingdao City, China. With a focus on innovation and automation of cranes, spider cranes, boom lifts, scissor lifts, lift tables, vacuum lifters and suction cups. Our factory produces a range of high-quality products, these products are popular among our customers for their durability, reliability, and excellent performance.

We are committed to providing our customers with the best possible products and services. Our team works hard to ensure that every product is manufactured to the highest quality standards and meets the specific needs of our customers.

Our products have successfully been exported to over a hundred countries and regions around the world, including the United States, Canada, Russia, Australia, Spain, Germany, Brazil, Mexico, Saudi Arabia, Qatar and so on. This is a testament to the quality and reliability of our production.

Qingdao YILU Intelligent Equipment Co., Ltd is a factory that is committed to excellence, innovation, and customer satisfaction. We are proud of the products that we produce and the services that we provide. Contact us to learn more about our products and how we can help you with your business needs, warmly welcome friends all over the world to visit our factory!

ONE STOP SERVICE FOR
MATERIAL HANDING EQUIPMENT
AND
AERIAL WORK PLATFORMS



CONTENTS

LIFT TABLE	STANDARD TYPE	01
	U SHAPE	04
	LOW PROFILE	05
	PALLET POSITIONER	06
CRANE	SPIDER CRANE	09
	TOWABLE BOOM LIFT	13
	CRAWLER BOOM LIFT	17
SCISSOR LIFT	SELF PROPELLED SCISSOR LIFT	19
	MINI SELF PROPELLED SCISSOR LIFT	21
	MOBILE SCISSOR LIFT	23
VACUUM LIFTER	VACUUM LIFTER ROBOTS	25
	X SHAPE—MANUAL TYPE	27
	X SHAPE—FULL ELECTRIC TYPE	28
	METAL SHEET TYPE	29



STANDARD TYPE

STATIONARY SCISSOR LIFT TABLE


Model	Load capacity(kg)	Self height(mm)	Max platform height (mm)	Platform size(mm)	Lifting time(s)	Net weight(kg)
HW1001	1000	205	990	1300×820	20~25	160
HW1002	1000	205	990	1600×1000	20~25	186
HW1003	1000	240	1300	1700×850	30~35	200
HW1004	1000	240	1300	1700×1000	30~35	210
HW1005	1000	240	1300	2000×850	30~35	212
HW1006	1000	240	1300	2000×1000	30~35	223
HW1007	1000	240	1300	1700×1500	30~35	365
HW1008	1000	240	1300	2000×1700	30~35	430
HW2001	2000	230	1000	1300×850	20~25	235
HW2002	2000	230	1000	1600×1000	20~25	268
HW2003	2000	250	1300	1700×850	25~35	289
HW2004	2000	250	1300	1700×1000	25~35	300
HW2005	2000	250	1300	2000×850	25~35	300
HW2006	2000	250	1300	2000×1000	25~35	315
HW2007	2000	250	1400	1700×1500	25~35	415
HW2008	2000	250	1400	2000×1800	25~35	500
HW4001	4000	240	1050	1700×1200	30~40	375
HW4002	4000	240	1050	2000×1200	30~40	405
HW4003	4000	300	1400	2000×1000	35~40	470
HW4004	4000	300	1400	2000×1200	35~40	490
HW4005	4000	300	1400	2200×1000	35~40	480
HW4006	4000	300	1400	2200×1200	35~40	505
HW4007	4000	350	1300	1700×1500	35~40	570
HW4008	4000	350	1300	2200×1800	35~40	655
HD1000	1000	305	1780	1300X820	35~45	210
HD2000	2000	360	1780	1300X850	35~45	295
HD4000	4000	400	2050	1700X1200	55~65	520
HT1000	1000	470	3000	1700x1000	35~45	450
HT2000	2000	560	3000	1700x1000	50~60	750
HF400	400	600	4140	1700x1000	30~40	800
HF800	800	706	4210	1700x1000	70~80	858
HF2000	2000	850	4200	2500x1500	80~90	980
HW501	500	200	1000	1200*600	20~25	120
HW502	500	200	1000	1200*800	20~25	130
HW500L	500	200	1000	2000*800	20~25	240
HD2000L	2000	205	1000	2500*820	20~25	300
HD4000L	4000	230	1000	2500*850	20~25	320
HD8000L	8000	240	1050	3000*1200	20~25	370
HW1001Z	1000	180	770	610*916	15~20	115
HW0501Z	500	180	950	610*916	17~22	160
HW1001	1000	190	1010	1300*800	20~25	160
HW2001	2000	190	1010	1300*800	20~25	235
HW3001	3000	220	1010	1300*800	20~25	350



FEATURES & ADVANTAGES

- 1 Surface treatment: shot blasting and stoving varnish with anti-corrosion function.
- 2 High quality pump station makes scissor lift table lifts and fall very stable.
- 3 Anti-pinch scissor design; main pin-roll place adopts self-lubricating design which prolong life span.
- 4 Removable lifting eye to help lift the table and install.
- 5 Heavy duty cylinders with drainage system and check valve to stop the lift table dropping in case of hose burst.
- 6 Pressure relief valve prevent overload operation; Flow control valve make descent speed adjustable.
- 7 Equipped with aluminum safety sensor under the platform for anti-pinch while dropping.
- 8 Up to American standard ANSI/ASME and Europe standard EN1570
- 9 Safe clearance between scissor to prevent damages during operation.
- 10 Brief structure make it much easier to operate and maintain.
- 11 Stop at the per-concerted and accurate location point.


OPTIONAL

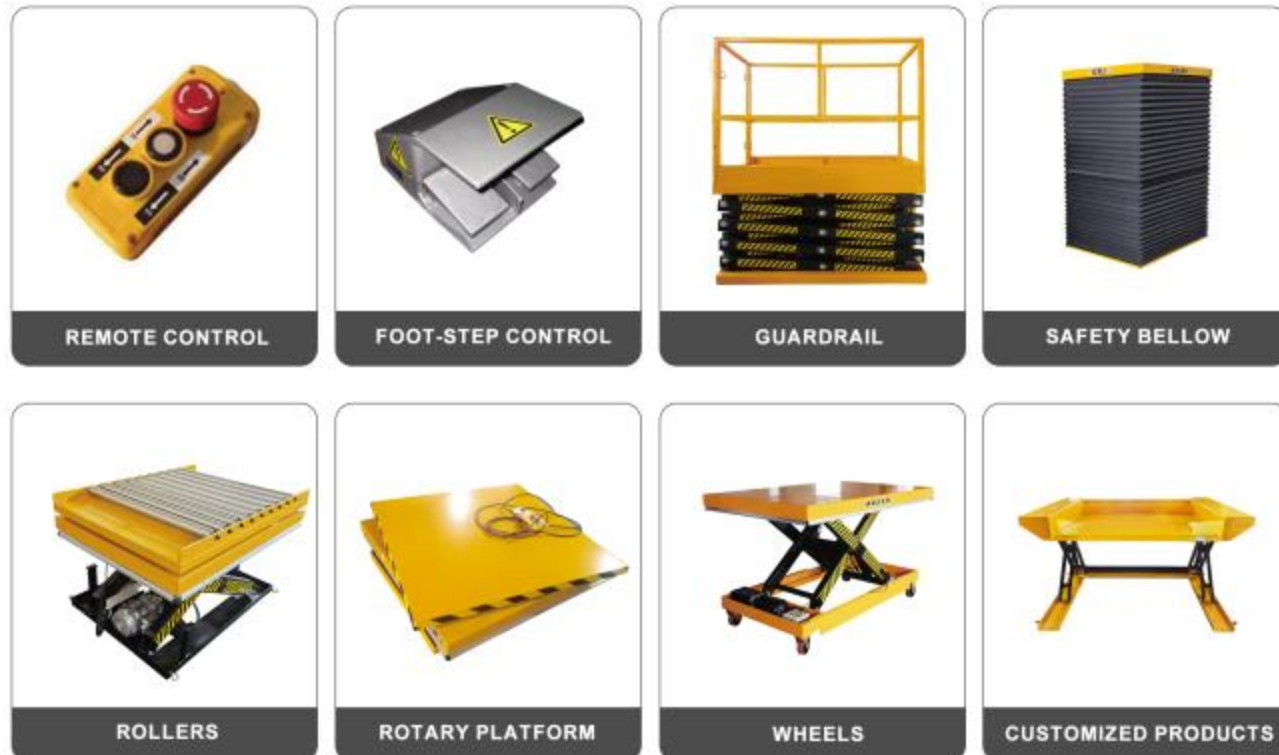


U SHAPE

STATIONARY SCISSOR LIFT TABLE

Model	HU600	HU1000	HU1500
Load Capacity (kg)	600	1000	1500
Max. Platform Height (mm)	860	860	860
Self Height (mm)	85	85	105
Platform Size (mm)	1450x985	1450x1140	1600x1180
Lifting Time (s)	25-35	25-35	30-40
Net Weight (kg)	207	280	380

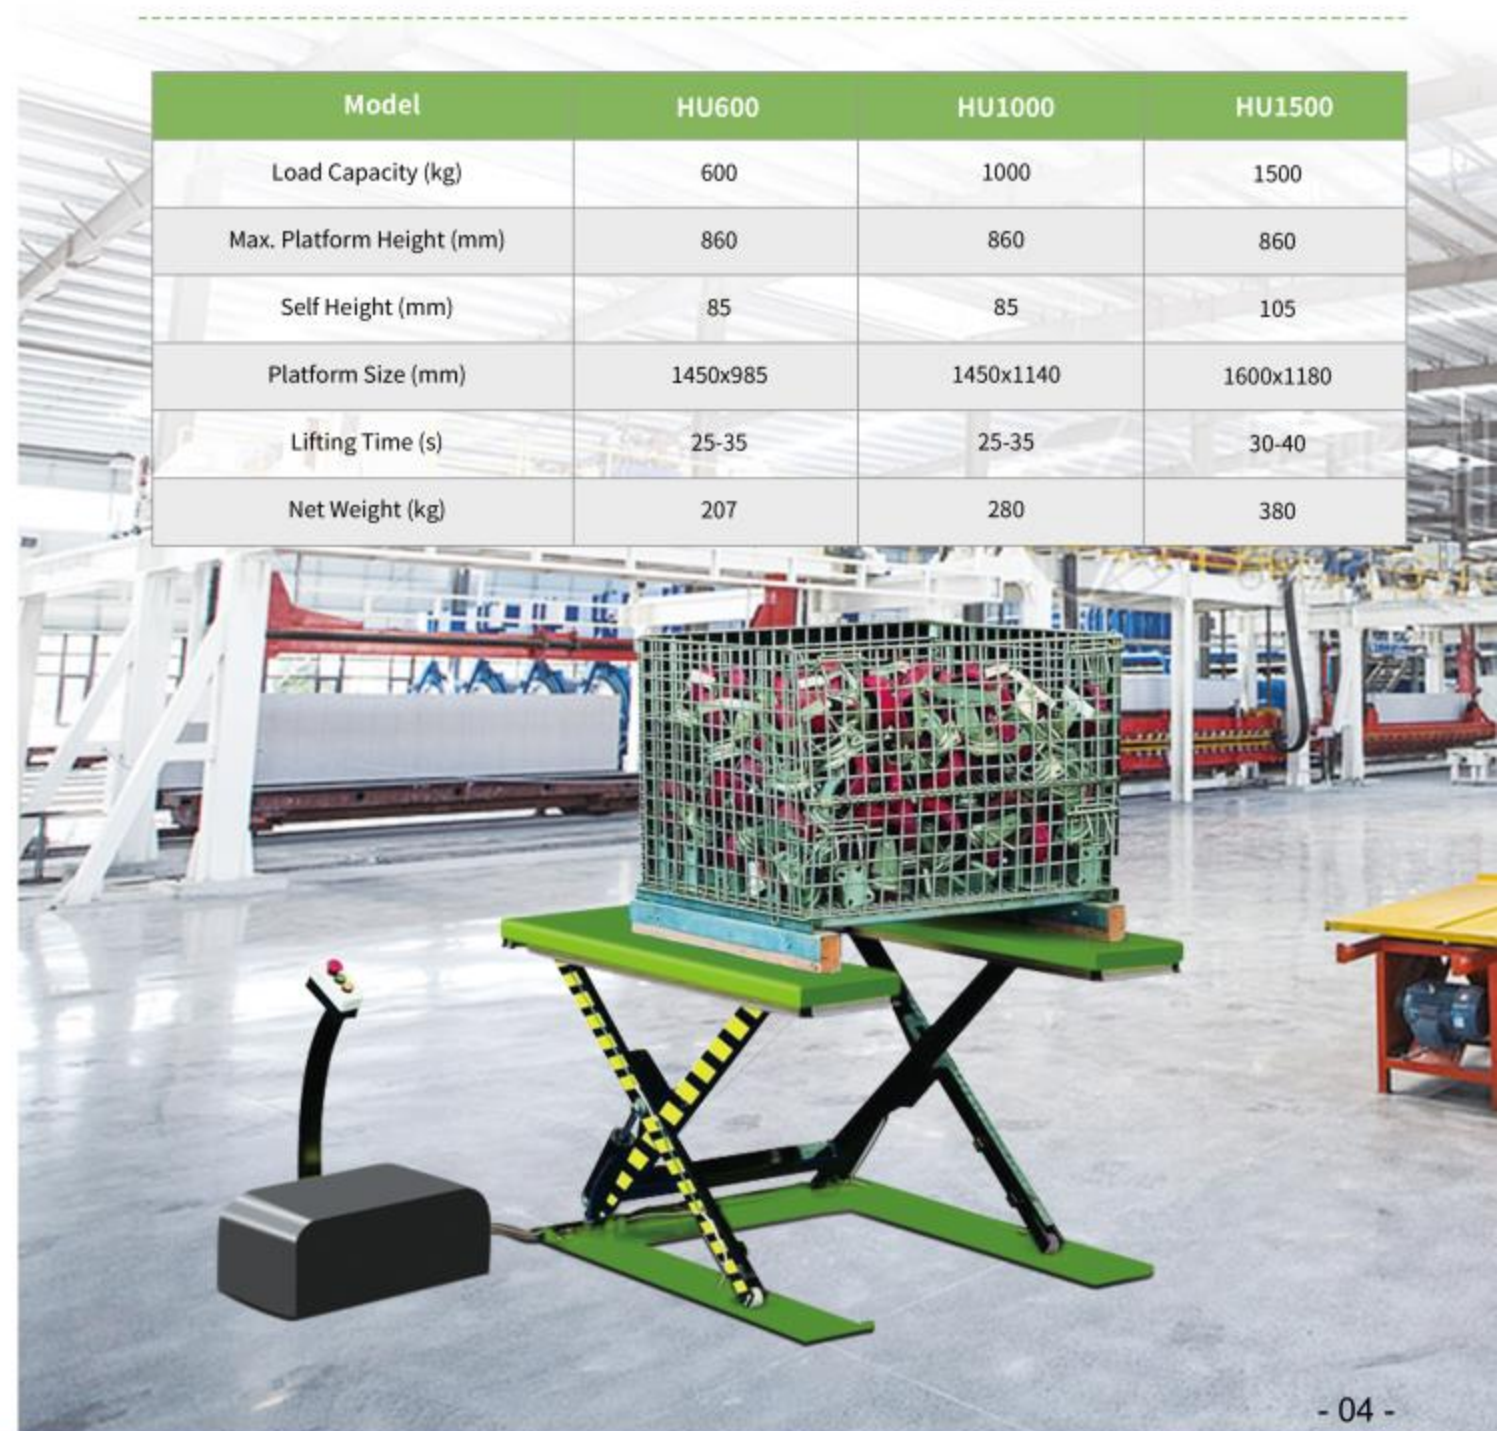

LOW PROFILE STATIONARY SCISSOR LIFT TABLE

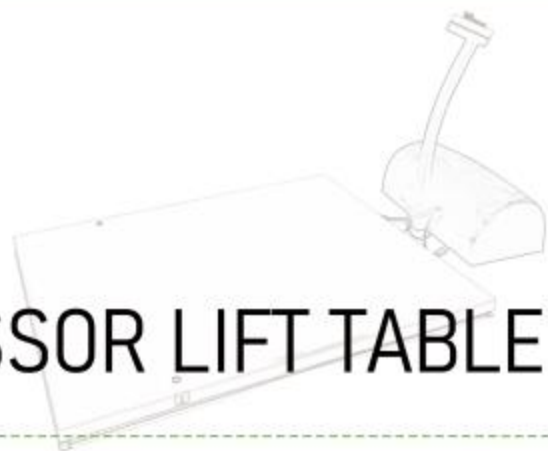

Model	Load Capacity (kg)	Self Height (mm)	Max Platform Height (mm)	Platform Size (mm)	Lifting time (S)	Net weight (kg)
HY1001	1000	85	860	1450*1140	25-35	357
HY1002	1000	85	860	1600*1140	25-35	364
HY1003	1000	85	860	1450*800	25-35	326
HY1004	1000	85	860	1600*800	25-35	332
HY1005	1000	85	860	1600*1000	25-35	352
HY1501	1500	105	870	1600*800	30-40	302
HY1502	1500	105	870	1600*1000	30-40	401
HY1503	1500	105	870	1600*1200	30-40	415
HY2001	2000	105	870	1600*1200	35-45	419
HY2002	2000	105	870	1600*1000	35-45	405



PALLET POSITIONER STATIONARY SCISSOR LIFT TABLE



Model	HW2000A
Load Capacity (kg)	182-2000kg
Max. Pallet Size (mm)	1270*1270*1820
Base Size (mm)	920*933
Lowered Platform Height (mm)	242
Max Platform Height (mm)	705
Rotary Platform Diameter (mm)	1108
Net Weight (kg)	173
Construction	Steel
Operation	Spring Lift



CUSTOMIZED TYPE STATIONARY SCISSOR LIFT TABLE

Please inform us the load capacity & platform size & the lifting height and other requests details you want, then we can provide you a proper proposal.



CRANE SERIES

CRAWLER SPIDER CRANE



Model		CL1.5	CL3.0	CL5.0	CL8.0	CL10.0	CL12.0	CL14.0	CL16.0
Specifications		1.5ton	3ton	5ton	8ton	10ton	12ton	14ton	16ton
Maximum Operating Radius		6m	10.5m	15m	18m	18m	19m	23m	23m
Maximum Ground Lift		6.5m	10.8m	17m	21m	21m	21m	25m	25m
Winch Device	Hook Lifting Speed	0-8m/min(4 ropes)		12m/min (4 ropes)		11m/min (4 ropes)		10m/min (4 ropes)	
	Steel Rope	Φ8mm×45m		Φ12mm×80m		Φ12mm×100m		Φ12mm×120m	
Telescopic Device	Boom Form	2m*4-section	2.4m*6-section	4m*5-section	5m*5-section	5m*5-section	5m*5-section	6m*5-section	6m*5-section
	Boom Length/Time	6.5m/20s	3.1m-9.2m/20s	4.5m-17m/54s	5.5m-21m/54s	12.3m/58s	12.3m/60s	12.3m/40s	12.3m/40sec
Luffing Device	Boom Angle/Speed	0-78°/13s	0-78°/13s	0-78°/13s	0-78°/13s	0-78°/15s	0-78°/17s	0-78°/17s	0-78°/17s
Gyroscope	Rotation Angle	0-360° (Continuous)							
	Rotation Speed	60s	60s	38s	38s	40s	42s	42s	42s
Outrigger	Movement Form	Manual screw out+oil pressure automatic support (two legs)				Manual screw out+hydraulic telescopic+automatic support			
Running Gear	Walking Mode	Hydraulic motor drive							
	Walking Speed	0-2.5km/h							
	Gradeability	25° (36%)							
Electrical Machinery	Voltage	AC 380V (Customized according to customer needs)							
Engine	Manufacturer	Honda	Changchai	Yunnei	Yunnei	Yunnei	Yunnei	Yuchai	Yuchai
	Start Mode	Electric start							
	Fuel/Volume	Gasoline/4L	Diesel Oil/8L	Diesel Oil/45L					
Operating System	Boom/Leg	Manual operation, manual walking (optional remote control)							
Power		AC+Gasoline	AC+Diesel	AC+Diesel	AC+Diesel	AC+Diesel	AC+Diesel	AC+Diesel	AC+Diesel
Overall Size (L*W*H)		2.5*0.6*1.5m	3.5*0.8*1.85m	4.7*1.5*2.25m	6.15*1.6*2.25m	6.15*1.8*2.3m	6.15*1.86*2.48m	6.6*2*2.48m	6.6*2*2.48m
Net Weight		1300kg	2700kg	6100kg	8700kg	10500kg	12500kg	14500kg	16500kg

YILU LIFT Crawler Spider Crane combines the space-saving qualities of a spider crane with the powerful lifting capabilities of a pick-and-carry crane inside one practical machine. This compact equipment offers an alternate solution to the difficulties associated with lifting in areas with restricted access.



OPTIONAL >>



Optional 1 >

Wireless remote control



Optional 2 >

Wireless remote control with screen how torque display



Optional 3 >

High matching proportional valve



Optional 4 >

Man Basket, 1m/1.2m/1.35m
1.5m/1.65m/1.8m long



Optional 5 >

Torque alarm display +
overload alarm



Optional 6 >

Leg lift sensor + unloading
valve



Optional 7 >

One button of outriggers,
loaded on remote control



Optional 8 >

Vice JIB: 2m/3m/4m/5m long



Optional 9 >

Hydraulic JIB: 2m/3m/4m
5m long



Optional 10 >

Japan Yanmar diesel engine / America EPA
marked emission standard diesel engine /
Europe V emission standard diesel engine

SHOW DETAILS >>



Spider Outriggers Design
(1.2-3ton)



Automatic telescopic
Outriggers Design (5-18Ton)



Driver's seat (5-18Ton)



AC Electric Plug & legs control



Smart Monitor System



Electrical & Mechanical



Powerful Cylinder+Safety Valve



Cylinder Cover Protection



Durable Track Chassis, can be
disassembled with the body



Boom: 70 manganese high
manganese steel, light weight
and higher strength



Hoist: The internal five star
motor has a higher pressure
and transmission ratio




Electric Control Box,
Electric+Oil dual

5TON~16TON



BOOM LIFT SERIES

TOWABLE BOOM LIFT

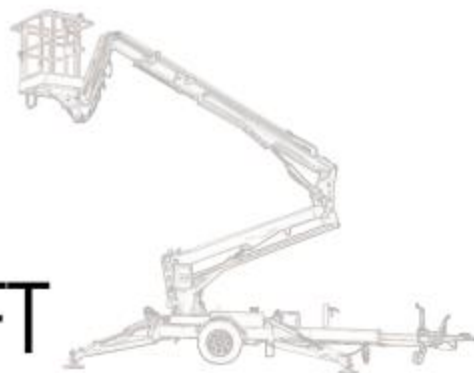

MODEL	TBL-12A	TBL-14A	TBL-14AT +TELESCOPIC	TBL-16A +TELESCOPIC	TBL-18A +TELESCOPIC	TBL-20A +TELESCOPIC	TBL-20AM +TELESCOPIC	TBL-22A +TELESCOPIC	TBL-24A +TELESCOPIC
Working height	12M	14M	14M	16M	18M	20M	20M	22M	24M
Lifting height	10M	12M	12M	14M	16M	18M	18M	20M	22M
Load capacity	300KG	220KG	300KG	300KG	220KG	220KG	220KG	220KG	220KG
Platform size	1.2*0.8M								
Working radius	5.5M	6.5M	7.8M	8.5M	10.5M	11M	10.5M	11M	11M
Power	AC-electrical / Diesel / Gasoline / DC Battery								
Length After Folding Tractor (D)	5.2M	6.2M	4.7M	5.55M	5.7M	6.5M	5.5M	5.8M	5.8M
Wind Resistance Level	≤5								
Rotation	359 degree								360 degree
Net Weight	1950KG	2100KG	2150KG	2150KG	2350KG	3800KG	3700KG	4500KG	5000KG
Overall Width (A)	1.7M	1.7M	1.7M	1.7M	1.7M	1.8M	1.8M	1.9M	1.9M
Stowed Height (B)	2.1M	2.1M	2.1M	2.1M	2.2M	2.25M	2.25M	2.25M	2.25M
Overall Length (C)	6.3M	7.3M	5.8M	6.65M	6.8M	7.6M	6.6M	6.9M	6.9M
20'/40'Container Loading Quantity	1set/3sets	1set/3sets	1set/3sets	1set/3sets	1set/3sets	1set/2sets	1set/3sets	1set/2sets	1set/2sets

- Electric power, optional diesel/gasoline/battery/dual power
- Towing speed: 100Km/h, both mechanical brake and electromagnetic brake
- Use Germany ALKO re-tractor, with 5cm tow ball, safe and stable
- 100% waterproof and dust proof control box, suitable for outdoors working.
- Self Leveling basket with anti-pinch design and automatic hydraulic outriggers, with caution lights
- Double acting cylinders with balance valve and emergency decline switch
- Equipped with Torsion Shaft with great shock absorption function.
- Hydraulic oil filtration alarm system, remind you replace hydraulic oil when there is impurity in the oil.
- Basket and Arm lock system avoid equipment body wagging during transportation.
- Humanized Flood lights on platform, traffic lights can be connected on the trailer.
- Above sales pack, includes FREE quick wear parts





FRICTION WHEEL WALKING DEVICE
(automatic moving with remote control)



ELECTRIC BASKET ROTATION $\pm 80^\circ$



300KG LOAD CAPACITY



REMOTE CONTROL LIFTING/LOWERING



OVERLOAD SENSOR



ONE BUTTON OUTRIGGERS LEVELLING



PLATFORM AC POWER SOCKET



WHOLE MACHINE WATERPROOF



Adopt international universal traction bar, foldable, can hang different types of cars.

TRACTION BAR



Touch the screen to control the up and down, 360° rotation, and tilt angle of the platform to alarm, making the operation more convenient.

TOUCH SCREEN CONTROL PANEL



Control panel on basket for up control

CONTROL PANEL



Only when foot stepping on this switch, machine able to work to avoid unconscious operation

SAFETY FOOT-STEP CONTROL



4 joysticks controls the lifting/ lowering/extension/ withdraw of booms

CONTROL HANDLE




Special design cambered joint precise joint connection/clamps

CAMBERED JOINT




BOOM LIFT SERIES

CRAWLER ARTICULATED BOOM LIFT

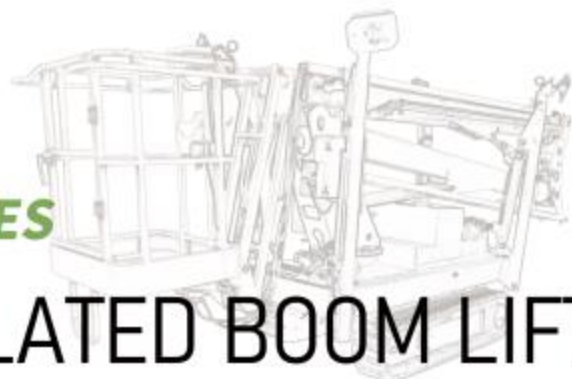

MODEL	TBL-12C	TBL-14C	TBL-16C +TELESCOPIC	TBL-18C +TELESCOPIC	TBL-20C +TELESCOPIC	TBL-22C +TELESCOPIC
Working height	12M	14M	16M	18M	20M	22M
Lifting height	10M	12M	14M	16M	18M	20M
Load capacity	200KG/300KG					
Platform size	0.9*0.7m or 0.8*1.2m as per requests					
Working radius	5.5M	6.5M	8.5M	10.5M	10.5M	11M
Supporting Legs Stride	3x4.7M	3.6x4.7M	3.6x4.7M	3.9x4.9M	3.9x4.9M	3.9x4.9M
Power	Diesel/Gasoline/Battery Power					
Wind Resistance Level	≤5 (10.7m/s)					
Working Temperature	-25~60°C environmental temperature					
Net Weight	2200KG	2400KG	2700KG	3400KG	4700KG	5200KG
Overall Length*Width*Height	5.2*1.7*2.1M	6.2*1.7*2.1M	5.55*1.7*2.1M	5.7*1.7*2.2M	6.5*1.8*2.3M	6.6*1.8*2.3M

Tracked boom lift is equipped with diesel power, able change to battery or gasoline power, suitable to work at construction site or muddy road.

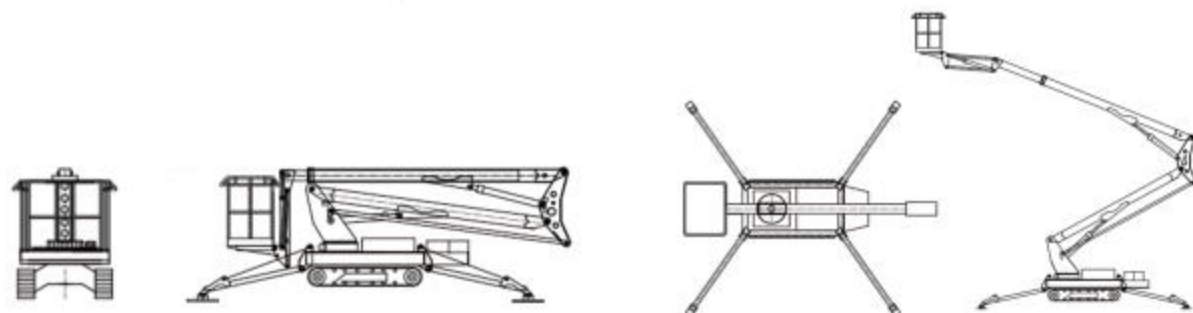

HYDRAULIC DRIVEN SERIES SELF PROPELLED SCISSOR LIFT

Model		GTJZ08	GTJZ10	GTJZ12	GTJZ14	GTJZ16
Maximum working height	m	8	10	12	13.8	15.8
Maximum platform height	m	6	8	10	11.8	13.8
Lifting capacity	kg	300	300	300	300	230
Lifting extend capacity	kg	113	113	113	100	100
Platform size	mm	2270x1150	2270x1150	2270x1150	2270x1150	2640x1150
Platform extend size	mm	900	900	900	900	900
Folding maximum height(guardrail unfolding)	mm	2150	2275	2400	2525	2550
Folding maximum height(guardrail removed)	mm	1690	1815	1940	2065	2100
Whole length	mm	2400	2400	2400	2400	2770
Whole width	mm	1150	1150	1150	1150	1300
Minimum ground clearance (folding)	mm	110	110	110	110	100
Minimum ground clearance (rising)	mm	20	20	20	20	20
Wheelbase	mm	1850	1850	1850	1850	2230
Minimum turn radius (inner wheel)	mm	0	0	0	0	0
Minimum turn radius (outer wheel)	mm	2100	2100	2100	2100	2700
Power source	v/kw	24/4	24/4	24/4	24/4	24/4.5
Running speed(folding)	km/h	3.5	3.5	3.5	3.5	3.5
Running speed(rising)	km/h	0.8	0.8	0.8	0.8	0.8
Rising/falling speed	sec	40/50	40/50	70/80	70/80	70/80
Battery	V/Ah	24/200	24/200	24/270	24/270	24/270
Charger	V/A	24/30	24/30	24/30	24/30	24/30
Maximum climbing ability	%	25	25	25	25	25
Maximum working allowable angle	/	2-3°	2-3°	2-3°	2-3°	2-3°
Way of control	/	Electro-hydraulic proportion control				
Driver	/	Double front-wheel				
Hydraulic drive	/	Double rear-wheel				
Wheel size (stuffed &no mark)	mm	φ381x127	φ381x127	φ381x127	φ381x127	φ381x127
Overall Net Weight	kg	1900	2080	2490	2760	3400

Hydraulic Self Propelled Scissor Lift is driven by hydraulic principle. Hydraulic motor supply power for both driving and lifting. It is different drive model with Electrical drive. Hydraulic self propelled scissor lift is famous for its high precision, great sensitivity, low ware and lower noise.




ELECTRIC DRIVEN TYPE MINI SCISSOR LIFT



Model		GTJZ5.0	GTJZ5.9	GTJZ6.8
Max.working height	m	5	5.9	6.8
Max. platform height	m	3	3.9	4.8
Lifting capacity	kg	300	300	300
Platform size	mm	1170x600	1170x600	1170x600
Whole length	mm	1180	1180	1180
Whole width	mm	760	760	760
Whole height	mm	1830	1930	1990
Minimum ground clearance	mm	60	60	60
Wheel base	mm	990	990	990
Minimum turn radius	mm	1200	1200	1200
Driving Motor	v/kw	2×24/0.4	2×24/0.4	2×24/0.4
Lifting Motor	v/kw	24/0.8	24/0.8	24/0.8
Battery	V/Ah	2×12/60	2×12/60	2×12/60
Charger	V/A	24/10	24/10	24/10
Maximum climbing ability	%	10-15	10-15	10-15
Maximum working allowable angle	/	2°	2°	2°
Overall Net Weight	kg	490	600	760



HYDRAULIC DRIVEN TYPE MINI SCISSOR LIFT

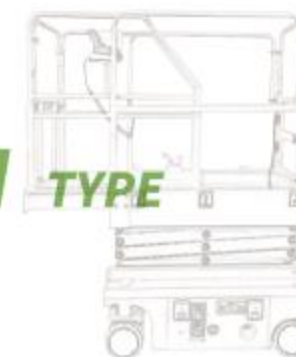

Model		GTJZ-5.0H	GTJZ-5.9H	GTJZ-6.8H
Max.working height	m	5	5.9	6.8
Max. platform height	m	3	3.9	4.8
Lifting capacity	kg	300	300	300
Platform size	mm	1170x600	1170x600	1170x600
Overall Length (With ladder/Without ladder)	mm	1340/1250	1340/1250	1340/1250
Overall Width	mm	760	760	760
Overall Height	mm	1830	1930	1990
Ground clearance	mm	60	60	60
Wheel base	mm	1010	1010	1010
Minimum turn radius	mm	1400	1400	1400
Driving Motor	V/kw	2×24/0.4	2×24/0.4	2×24/0.4
Lifting Motor	V/kw	24/1.2	24/1.2	24/1.2
Battery	V/Ah	2×12/80	2×12/80	2×12/80
Charger	V/A	24/10	24/10	24/10
Maximum climbing ability	%	10-15	10-15	10-15
Maximum working allowable angle	/	2°	2°	2°
Overall Net Weight	kg	650	700	930



MOBILE TYPE SCISSOR LIFT



Model	Table Size (mm)	Loading Capacity (kg)	Platform Height (m)	Working Height (m)	Retract Height (m)	Voltage (V)	Overall size (mm)	N.W. (kg)
SJY0506	2100*830	500	4	6	1.2	1/3phase	2250*950*1200	880
SJY0508	2100*830	500	6	8	1.2	1/3phase	2250*950*1200	880
SJY0509	2100*830	500	7	9	1.28	1/3phase	2250*950*1280	970
SJY0510	2100*930	500	8	10	1.38	1/3phase	2250*1060*1380	1050
SJY0511	2100*930	500	9	11	1.5	1/3phase	2250*1060*1500	1165
SJY0512	2100*1230	500	10	12	1.53	1/3phase	2250*1350*1530	1360
SJY0313	2100*1230	300	11	13	1.65	3phase	2250*1350*1650	1400
SJY0514	2550*1530	500	12	14	1.75	3phase	2796*1670*1750	2260
SJY0516	2812*1530	500	14	16	1.81	3phase	3067*1730*1810	2400
SJY0318	2812*1600	300	16	18	2.08	3phase	3067*1800*2080	3067
SJY0320	3070*1600	300	18	20	2.08	3phase	3321*1810*2080	3900
SJY1006	2100*1200	1000	4	6	1.18	3phase	2250*1350*1180	1250
SJY1008	2100*1200	1000	6	8	1.3	3phase	2200*1350*1300	1400
SJY1010	2100*1200	1000	8	10	1.42	3phase	2200*1350*1420	1585
SJY1012	2100*1200	1000	10	12	1.53	3phase	2200*1350*1530	1700
SJY1014	2550*1530	1000	12	14	1.75	3phase	2796*1670*1750	2560
SJY1016	2812*1530	1000	14	16	1.81	3phase	3067*1750*1810	2765
SJY1508	2100*1530	1500	6	8	1.53	3phase	2250*1750*1530	1780
SJY1510	2100*1530	1500	8	10	1.69	3phase	2250*1750*1690	2070
SJY1512	2100*1530	1500	10	12	1.85	3phase	2250*1750*1850	2250
SJY2008	2100*1530	2000	6	8	1.53	3phase	2250*1750*1530	1780
SJY2010	2100*1530	2000	8	10	1.69	3phase	2250*1750*1690	2070
SJY2012	2100*1530	2000	10	12	1.85	3phase	2250*1750*1850	2250


1. Flexible producing technique, suitable for customization.
2. Moving by man manually or tractor towed.
3. Lifting by AC(without battery) or DC(with battery) optional.
4. Explosion-proof valves (extra charged)
5. Overload protective system. (extra charged)
6. Single control solenoid valves : prevent dropping if power failure.

7. Simple structure, easy to maintain.
8. Load capacity 500~2000kg.
9. Max platform height from 4m to 18m.
10. Equipped with anti-skid plate
11. Emergency decline valve
12. Four supporting legs.



GL-LD SERIES

VACUUM GLASS LIFTER

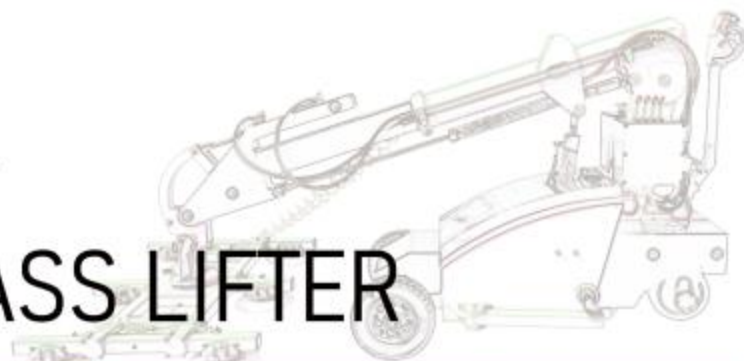

Model		GL-LD-200	GL-LD-300	GL-LD-400	GL-LD-500	GL-LD-600	GL-LD-800
Load Capacity		200kg (retract) 100kg (extend)	300kg (retract) 150kg (extend)	400kg (retract) 200kg (extend)	500kg (retract) 250kg (extend)	600kg (retract) 300kg (extend)	800kg (retract) 400kg (extend)
Lifting Height		2750mm	3500mm	3500mm	3700mm	3700mm	5000mm
QTY of Suction Cap		4pcs	4pcs	4pcs	6pcs	6pcs	8pcs
Rubber Suction Cap		Ø300mm	Ø300mm	Ø300mm	Ø300mm	Ø300mm	Ø300mm
Maintenance-free Battery		2*12V/35AH	2x12V/80AH	2x12V/100AH	2x12V/120AH	2x12V/120AH	2x12V/120AH
Battery Charger		Smart Charger	Smart Charger	Smart Charger	Smart Charger	Smart Charger	Smart Charger
Drive motor		24V/750W	24V/1200W	24V/600W	24V/900W	24V/900W	24V/1500W
Lifting Motor		2V4/1500W	24V/2000W/8L	24V/2000W/8L	24V/2000W/8L	24V/2000W/8L	24V/2200W/8L
Driving Wheel		Ø250x80mm	Ø250x80mm	Ø250x80mm	Ø300x100mm	Ø300x100mm	Ø300x125mm
N.W/G.W		600/630kg	1100/1150kg	1280/1330kg	1300/1350kg	1400/1450kg	1600/1760kg
Package Size		1820*700*1580mm	2560*1030*1700mm		2690*1150*1900mm		3100*1150*1900mm
Movement	Automatic (4 kinds)	1. Pad frame vertical up/down 180°automatic 2. Boom in/out 610/760mm automatic 3. Powered arm up/down automatic 4. Lateral side shift 100mm automatic					
	Manual (2kinds)	5. Pad frame tilt left/right 90° manual (Able to customized to automatic turn lift/right) 6. Pad frame rotation 360°manual (Able to customized to automatic rotation 360°)					

Optional 1> Need pad frame automatic tilt left/right 90°

Optional 2> Need pad frame automatic rotation 360°

Optional 3> Need speed fix remote control

Optional 4> Need speed adjustable remote control

Optional 5> Need maintenance free battery

Optional 6> Customized painting color



(remote control)




MANUAL X TYPE SUCTION CUPS



Model		GL-SC-400X	GL-SC-600X	GL-SC-800X	GL-SC-1000X	GL-SC-1200X
Lifting Capacity	kg	400	600	800	1000	1200
Cup Qty	pcs	4	6	8	10	12
Single Cup Size	mm	300	300	300	300	300
Single Cup Lifting Capacity	kg	100	100	100	100	100
Rotation & Tilting	/	360° manual rotation & 90° manual tilting				
Battery & Charger	/	12AH DC 12V battery, smart charger with power indicator				
Control System	/	5m long wire control (optional remote control)				
Sucker Frame Size	mm	850*750*300	1800*900*300	1760*1460*300	1900*1600*300	1900*1600*300
Extension Bar Length	mm	500				
Package Size	mm	1300*870*370				
Net Weight	kg	70	90	100	110	120
Gross Weight (With Wooden Box)	kg	97	110	123	150	163




FULL ELECTRIC X TYPE SUCTION CUPS

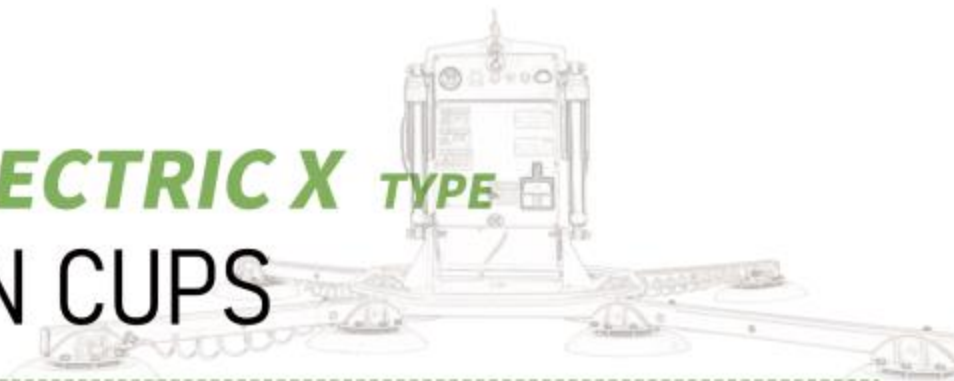

Model		GL-SC-400XE	GL-SC-600XE	GL-SC-800XE	GL-SC-1000XE	GL-SC-1200XE
Lifting Capacity	kg	400	600	800	1000	1200
Cup Qty	pc	4	6	8	10	12
Single Cup Size	mm	300	300	300	300	300
Single Cup Capacity	kg	100	100	100	100	100
Rotation/Tilt	/	360° electric rotate & tilt				
Battery	V/AH	24/20				
Charger	V/A	24V/6A				
Sucker Cup Size	mm	840*930	2420*1100	1980*1620	1980*1620	1980*1620
Package Size (With Wooden Box)	mm	1100*940*500				
Weight	kg	160	175	190	198	207




METAL SHEET TYPE SUCTION CUPS

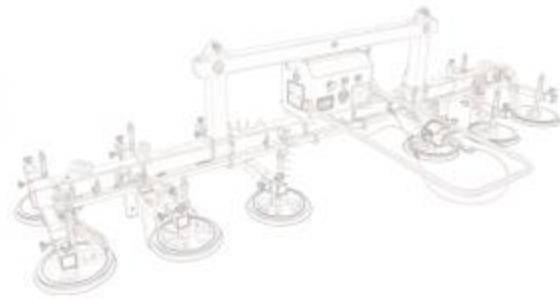

Model	GL-SC-600T	GL-SC-800T	GL-SC-1000T	GL-SC-1500T	GL-SC-2000T
Rated load capacity (kg)	600	800	1000	1500	2000
Suction cup size (mm)	φ210	φ210	φ210	φ300	φ300
Number of suckers	6/8	8	10	8/10	8/12
Length of Main Beam (mm)	2000	2000	2000	2800-5000	2800-5000
Length of Branch Beam (mm)	800	800	800	800	800
Suitable for sheet metal in Length (mm)	3000	3000	3000	6000	6000
Packing Size (mm)	2050*400*620	2050*400*620	2050*400*620	3070*730*480	3070*730*480
Weight (kgs)	145/155	155	160/170	240/255	255/275



OTHER TYPES SUCTION CUPS

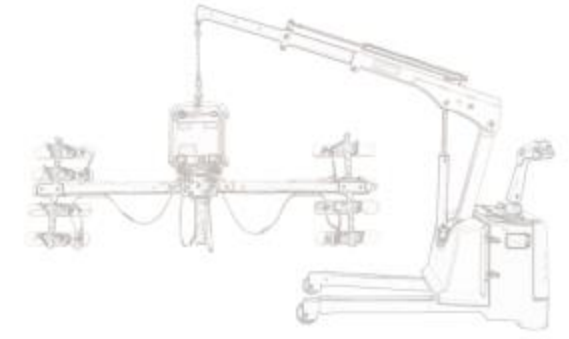

GL-HD VACUUM LIFTER



GL-HD VACUUM LIFTER



FORKLIFT FIXTURE VACUUM LIFTER



SEMI ELECTRIC GLASS MOVING TROLLEY



MANUAL GLASS MOVING TROLLEY



LINE TYPE SUCTION CUPS



MANUAL H TYPE SUCTION CUPS



FULL ELECTRIC H TYPE SUCTION CUPS



BIG PANEL SUCTION CUPS



PNEUMATIC VACUUM LIFTER



METAL SHEET PNEUMATIC VACUUM LIFTER



SANDWICH ROOF PANELS SUCTION CUPS